

01-03-00

1A

+

PTO/SB/05 (2/98) (modified)

Approved for use through 9/30/2000, OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

NEW UTILITY PATENT APPLICATION TRANSMITTAL

(only for new nonprovisional applications under
37 CFR 1.53(b))

Attorney Docket Number 3982 US

First Named Inventor Ting K. Yee

Total Pages in this
Submission 40

Express Mail Label No. EM350565405US

APPLICATION ELEMENTS

1. ☒ Fee Transmittal Form (in duplicate)
☐ Check Enclosed
2. ☒ Specification
(preferred arrangement set forth below)
 - Descriptive Title of the Invention
 - Cross Reference(s) to Related Case(s)
 - Statement Regarding Fed sponsored R & D
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawing(s)
 - Detailed Description
 - Claim or Claims
 - Abstract of the Disclosure
3. ☒ Drawing(s) (when necessary per 35 USC 113)
4. Oath or Declaration
 - a. ☒ New Declaration
☐ Executed
 - b. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
 - i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s)
named in the prior application, see 37 CFR
1.63(d)(2) and 1.33(b).
5. ☐ Incorporation by Reference (useable if Box 4b is checked). The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

ACCOMPANYING APPLICATION PARTS

6. ☐ Assignment & Assignment Recordation Cover Sheet
7. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
8. ☐ Information Disclosure Statement & PTO-1449
☐ Copies of IDS Citation(s)
9. ☐ Preliminary Amendment
10. Small Entity Statement
☐ New Statement enclosed
☐ Statement filed in prior application. Status still proper and desired
11. ☒ Return Postcard
12. ☐
13. ☐
14. ☐
15. ☐
16. ☐

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, D.C. 20231

17. If a **CONTINUING APPLICATION**, check appropriate box and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: ____/____

Prior application information: Examiner: _____ Group/Art Unit: _____

18. CORRESPONDENCE ADDRESS

NAME	Michael W. Farn Fenwick & West LLP				
ADDRESS	Two Palo Alto Square				
CITY	Palo Alto	STATE	CA	ZIP CODE	94306
COUNTRY	U.S.A.	TELEPHONE	(650) 858-7823	FAX	(650) 494-1417
Name (Print/Type)	Michael W. Farn			Registration No. (Attorney/Agent)	41,015
Signature	Michael W. Farn			Date	December 29, 1999

12/29/99
jc662 U.S. PTO

PTO
09/4/659

OPTICAL COMMUNICATIONS USING HETERODYNE DETECTION

Inventors: Ting K. Yee

Peter Chang

5

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates generally to optical fiber communications, and more particularly, to the use of heterodyne detectors in receivers for optical fiber communications systems.

2. Description of the Related Art

As the result of continuous advances in technology, particularly in the area of networking, there is an increasing demand for communications bandwidth. For example, the growth of the Internet, home office usage, e-commerce and other broadband services is creating an ever-increasing demand for communications bandwidth. Upcoming widespread deployment of new bandwidth-intensive services, such as xDSL, will only further intensify this demand. Moreover, as data-intensive applications proliferate and data rates for local area networks increase, businesses will also demand higher speed connectivity to the wide area network (WAN) in order to support virtual private networks and high-speed Internet access. Enterprises that currently access the WAN through T1 circuits will require DS-3 and OC-3 connections in the near future. As a result, the networking infrastructure will be required to accommodate greatly increased traffic.

Optical fiber is a transmission medium that is well-suited to meet this increasing demand. Optical fiber has an inherent bandwidth which is much greater than metal-based conductors, such

as twisted pair or coaxial cable. There is a significant installed base of optical fibers and protocols such as the OC protocol have been developed for the transmission of data over optical fibers. The transmitter converts the data to be communicated into an optical form and transmits the resulting optical signal across the optical fiber to the receiver. The receiver recovers the original data from the received optical signal. Recent advances in transmitter and receiver technology have also resulted in improvements, such as increased bandwidth utilization, lower cost systems, and more reliable service.

However, current optical fiber systems also suffer from drawbacks which limit their performance and/or utility. For example, optical fibers typically exhibit dispersion, meaning that signals at different frequencies travel at different speeds along the fiber. More importantly, if a signal is made up of components at different frequencies, the components travel at different speeds along the fiber and will arrive at the receiver at different times and/or with different phase shifts. As a result, the components may not recombine correctly at the receiver, thus distorting or degrading the original signal. In fact, at certain frequencies, the dispersive effect may result in destructive interference at the receiver, thus effectively preventing the transmission of signals at these frequencies. Dispersion effects may be compensated by installing special devices along the fiber specifically for this purpose. However, the additional equipment results in additional cost and different compensators will be required for different types and lengths of fiber.

As another example, the transmitter in an optical fiber system typically includes an optical source, such as a laser, and an external modulator, such as a Mach-Zender modulator (MZM). The source generates an optical carrier and the modulator is used to modulate the optical carrier with the data to be communicated. In many applications, linear modulators are preferred in order to increase the performance of the overall system. MZMs, however, are inherently nonlinear devices. Linear operation is approximated by biasing the MZM at its quadrature point and then limiting operation of the MZM to a small range around the quadrature point, thus reducing the effect of the MZM's nonlinearities. However, this results in an optical

signal with a large carrier (which contains no information) and a small modulated signal (which contains the data to be communicated). A larger optical signal to noise ratio is required to compensate for the large carrier.

Thus, there is a need for optical communications systems which reduce or eliminate the deleterious effects caused by fiber dispersion. There is further a need for approaches which reduce the power contained in the optical carrier.

SUMMARY OF THE INVENTION

In accordance with the present invention, a receiver is for recovering an information signal from an optical signal which includes at least one tone and at least one sideband of the information signal. The optical carrier for the optical signal may serve as the tone or the tone may be located at a different frequency. The receiver includes a heterodyne detector coupled to a signal extractor. The heterodyne detector mixes the optical signal with an optical local oscillator signal to produce an electrical signal which is a frequency down-shifted version of the optical signal. The signal extractor mixes one of the tones with one of the sidebands, generating a component, preferably a difference component, which contains the original information signal.

In one embodiment, the signal extractor includes two frequency filters and a square law device. The first frequency filter selects both the tone and the sideband from the electrical signal received from the heterodyne detector. The square law device squares the signal containing the tone and sideband, thus mixing the two. The second frequency filter selects the difference component generated in the mixing. In another embodiment, the signal extractor includes three frequency filters and a multiplier. Two of the frequency filters select the tone and sideband, respectively, from the electrical signal produced by the heterodyne detector. The multiplier multiplies the tone with the sideband, thus mixing them. The third frequency filter selects the resulting difference component.

In yet another embodiment, the optical signal includes two sidebands, for example an upper and a lower sideband. The signal extractor includes two extraction paths and a combiner. Each extraction path recovers a component from one of the sidebands, by mixing the applicable sideband with a tone. The two sidebands are then constructively combined by the combiner, for example by first phase-shifting them to be in-phase with each other. The resultant component contains the information signal.

The present invention has many advantages. For example, sidebands are processed separately from each other. This reduces the dispersion effects since the sidebands are prevented from destructively interfering with each other. The use of the difference component, rather than for example the sum component, results in the cancellation of phase noise which is common to both the sideband and the tone. As a final example, if a pilot tone is used, the optical carrier may be significantly reduced.

In further accordance with the invention, a method for recovering an information signal from the optical signal includes the following steps. The optical signal is received. An optical local oscillator signal is also received. The optical signal is detected using heterodyne detection and the optical local oscillator signal, resulting in an electrical signal which is a frequency down-shifted version of the optical signal. One of the sidebands is mixed with one of the tones to generate a component, preferably a difference component, containing the information signal.

BRIEF DESCRIPTION OF THE DRAWING

The invention has other advantages and features which will be more readily apparent from the following detailed description of the invention and the appended claims, when taken in conjunction with the accompanying drawing, in which:

FIG. 1 is a block diagram of a system 100 according to the present invention;

FIG. 2 is a flow diagram illustrating a method 200 for transmitting an information signal across a fiber, according to the present invention;

FIG. 3 is a diagram of one embodiment 310 of transmitter 110 using a Mach-Zender modulator;

FIG. 4 is a graph illustrating a transfer function 400 for MZM 314;

FIG. 5 is a diagram of another embodiment 510 of transmitter 110 using a three-armed modulator;

FIG. 6 is a block diagram of one embodiment 690 of signal extractor 190 based on squaring a signal containing a tone and a sideband;

FIG. 7 is a block diagram of another embodiment 790 of signal extractor 190 based on multiplying a tone with a sideband;

FIG. 8 is a block diagram of yet another embodiment 890 of signal extractor 190 using separate extraction paths to process different sidebands;

FIG. 9 is a block diagram of one embodiment 990 of signal extractor 890 based on multiplying a tone with a sideband; and

FIG. 10 is a diagram of another embodiment 1010 of transmitter 110 using pilot tones.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIG. 1 is a diagram of a system 100 according to the present invention. System 100 includes a transmitter 110 coupled to a receiver 130 by optical fiber 120. The receiver 130 preferably includes a heterodyne detector 180 coupled to a signal extractor 190. System 100 is used to transmit an information signal from transmitter 110 to receiver 130 via fiber 120.

With reference to the flow diagram of FIG. 2 as well as to FIG. 1, system 100 operates as follows. The frequency spectrum of an exemplary information signal is shown by spectrum 140, which is characterized by a frequency f_s . The frequency f_s could be zero, for example, if the information signal is based on on-off keying. The information signal 140 may be any of a variety of signals. For example, it may be a single high speed data stream. Alternately, it may contain a number of data streams which are time-division multiplexed together, for example, if 64 OC-3 data streams are combined together to form a single OC-192 signal, which serves as the information signal 140. As another example, the information signal may include a number of constituent signals, each of which occupies a different frequency band within spectrum 140. In other words, the constituent signals may be frequency division multiplexed together. Other types of information signals 140 and methods for combining constituent signals to form the information signal 140 will be apparent.

Transmitter 110 receives 210 the information signal 140 and generates 220 an optical signal 142. Optical signal 142 is characterized by a carrier frequency f_c and includes at least one sideband 144 based on the information signal 140 and at least one tone 146, shown at a frequency f_t in the following examples. Various techniques may be used to achieve this function. In a preferred embodiment, transmitter 110 includes an optical source 112 coupled to an optical modulator 114. Examples of optical sources include solid state lasers and semiconductor lasers. Example optical modulators 114 include Mach Zehnder modulators, electro-optic modulators, and electro-absorptive modulators. The optical source 112 produces an optical carrier at the carrier frequency f_c . The modulator 114 receives 210 the information signal 140 and modulates the optical carrier with the information signal 140 to generate 220 optical signal 142. In the example of FIG. 1, double sideband modulation is illustrated, resulting in two sidebands (upper sideband 144U and lower sideband 144L) which are centered about the carrier frequency f_c . Other types of modulation, such as single sideband modulation, could also be used. Continuing this example, the modulator 114 also produces a significant component at the carrier frequency f_c , which serves as a tone 146. Alternately, transmitter 110 may include an internally modulated

laser. In this case, the information signal 140 drives the laser, the output of which is the optical signal 142.

The optical signal 142 is transmitted 230 over fiber 120 to receiver 130. Current optical fibers have two spectral regions which are commonly used for communications: the 1.3 and 1.55 micron regions. At a wavelength of 1.3 micron, transmission of the optical signal is primarily limited by attenuation in the fiber 120; dispersion is less of a factor. Conversely, at a wavelength of 1.55 micron, the optical signal will experience more dispersion but less attenuation. Hence, the optical signal preferably has a wavelength either in the 1.3 micron region or the 1.55 micron region and, for long distance communications systems, the 1.55 micron region is generally preferred.

At receiver 130, heterodyne detector 180 receives 235 the incoming optical signal 142 and also receives 240 an optical local oscillator signal 134 at a frequency f_{LO} . In FIG. 1, the local oscillator signal 134 is shown at a frequency f_{LO} which is lower than the carrier frequency f_c , but the local oscillator signal 134 may also be located at a frequency f_{LO} which is higher than the carrier frequency f_c . Examples of optical local oscillators 132 include solid state lasers and semiconductor lasers. The optical signal 142 and local oscillator signal 134 are combined 245 and heterodyne detection 250 of the combined signal effectively downshifts the optical signal 142 from a carrier at frequency f_c to a frequency Δf , which is the difference between the local oscillator frequency f_{LO} and the carrier frequency f_c . The resulting electrical signal has spectrum 150. Note that both sidebands 154L and 154U, and tone 156 have also been frequency downshifted compared to optical signal 142. Signal extractor 190 then mixes 260 at least one of the sidebands 154 with one of the tones 156 to produce, among other things, a component 170 located at the difference frequency Δf between the sideband 154 and tone 156. This difference component 170 contains the information signal 140, although it may be offset in frequency from f_s , depending on the frequencies of sideband 154 and tone 156. Components other than the difference component 170 may be used to recover the information signal. For example, the

mixing 260 typically also produces a sum component located at the sum frequency of sideband 154 and tone 156, and the information signal 140 may be recovered from this sum component rather than the difference component. If more than one sideband 154 is processed by signal extractor 190, each sideband 154 is processed separately from the others in a manner which prevents destructive interference between the sidebands.

However, recovering the information signal 140 based on the difference component of sideband 154 and tone 156 is advantageous because it results in noise cancellation. For example, sideband 154L and tone 156 are affected similarly by laser phase noise produced by optical source 112 and optical local oscillator 132. Using the difference component effectively subtracts the laser phase noise in sideband 154L from the laser phase noise in tone 156, resulting in significant cancellation of this noise source. In contrast, using the sum component would effectively reinforce the laser phase noise.

Processing the sidebands 154 separately from each other is also advantageous because it significantly reduces dispersion effects caused by fiber 120. For example, in direct detection receivers, upper and lower sidebands 154U and 154L would be processed together and, at certain frequencies for the sidebands 154 and lengths of fiber 120, the dispersion effects of fiber 120 would cause the two sidebands to destructively interfere, significantly impairing the recovery of information signal 140. By processing sidebands 154 separately from each other, signal extractor 190 avoids this deleterious dispersion effect.

In a preferred embodiment, heterodyne detector 180 includes a combiner 136 and a square law detector 137 coupled in series. Combiner 136 preferably is a fiber coupler, due to its low cost and applicability to fiber systems, although other types of combiners may be used. Square law detector 137 preferably is a PIN diode. Combiner 136 receives 235 the incoming optical signal 142 at one of its inputs and receives 240 the optical local oscillator signal 134 at the other input. Combiner 136 combines the local oscillator signal 134 with the optical signal 142 to produce the combined signal with spectrum 160. Heterodyne detector may also include a

polarization controller 139 coupled to the combiner 136 for matching the polarizations of the optical signal 142 and the local oscillator signal 134 so that the two signals are mixed efficiently at the square law detector 137. In FIG. 1, the polarization controller 139 is shown located between the local oscillator 132 and combiner 136 and controls the polarization of the local oscillator signal 134. Alternately, the polarization controller 139 may be located between the fiber 120 and combiner 136 and control the polarization of the optical signal 142. In another approach, polarization controller 139 may control the polarizations of both signals 134 and 142. Square law detector 137 produces a photocurrent which is proportional to the intensity of signal 160, which effectively mixes together the various components in spectrum 160. The resulting electrical signal has a number of components located at different frequencies, with the components of interest shown by spectrum 150. Spectrum 150 is similar to spectrum 142, but frequency downshifted from the carrier frequency f_c to the difference frequency Δf .

FIGS. 3-9 are examples of various embodiments of signal extractor 190. These embodiments are illustrated using the example of FIG. 1 in which optical signal 142 includes two sidebands 144 and the optical carrier functions as a tone 146. The invention, however, is not limited to this specific example. Modulation schemes besides double sideband may be used (e.g., single sideband). Similarly, the tone 146 may be located at frequencies other than the carrier frequency f_c and/or multiple tones 146 may be used.

FIG. 3 is a diagram of one embodiment 310 of transmitter 110, in which modulator 114 includes a Mach-Zender modulator (MZM) 314. MZM 314 includes two arms 316A and 316B, and an electrode 318 for receiving information signal 140. The optical carrier produced by source 112 is received by MZM 314, which splits it into two signals, one propagating through each arm 316. The information signal 140 applied to electrode 318 produces an electric field across each of the arms 316, causing a difference in the optical path through each arm 316 (e.g., due to the electro-optic effect). As a result of this difference in optical path, the optical signals propagating through the two arms 316A and 316B will either constructively or destructively

interfere when they are recombined at the output of the MZM 314. In other words, the output of MZM 314 depends on the relative phase difference between the two arms 316, which in turn depends on information signal 140.

FIG. 4 graphs the intensity of MZM 314 as a function of the relative phase shift between the two arms 316. Since MZM 314 is interferometric, the intensity of its optical output is a sinusoidal function of the relative phase shift between the two arms 316. For example, if the relative phase shift between the two arms 316 is a multiple of 2π , then the signals in the two arms will constructively interfere, yielding a maximum intensity at the output as indicated by points 402A-402C. At the other extreme, two arms 316 which are out of phase will destructively interfere, yielding a minimum intensity at the output as shown by points 404A-404B, which shall be referred to as V_π points. The interim cases result in the raised cosine transfer function 400 of FIG. 4. As described above, the relative phase shift is determined by the received information signal 140.

In one aspect of transmitter 310, the MZM 314 is biased at one of the quadrature points 406A-406D. At these quadrature points 406, the raised cosine transfer function may be used to approximate a linear transfer function, particularly if the modulator 314 is operated over a limited range around the quadrature points 406. When operated in this fashion, transmitter 310 results in the optical signal shown in spectrum 320. The raised cosine nature of transfer function 400 results in dual sidebands 324L and 324U; and operation at the quadrature point 406 results in a large component at the carrier frequency f_c , which may be used as a tone 326.

FIG. 5 is a diagram of another embodiment 510 of transmitter 110, in which the optical modulator 114 includes a three-armed modulator 514. Modulator 514 includes three arms 516A-516C. Two arms 516A-516B form a conventional MZM and information signal 140 modulates the signal in these two arms in the same manner as MZM 314 of FIG. 3. However, the MZM formed by arms 516A-516B is not biased at one of the quadrature points 406. Rather, it is operated at one of the V_π points 404. The result is an optical signal which includes two

sidebands 524L and 524U but no optical carrier at f_c since operation at the V_π point 404 suppresses the carrier. The third arm 516C is used to reintroduce the optical carrier, preferably in a controlled manner by adjusting both the amplitude and phase of the carrier. For example, the amplitude and phase could be determined by adjusting the splitting ratios between the three arms 516 and/or the lengths of the arms 516, respectively. Alternately, control signal 530 could be used to adjust elements in arm 516C which control the amplitude and phase of the carrier in the arm. The reintroduced carrier then functions as a tone 526 in optical signal 520. This approach is advantageous compared to transmitter 314 because the amplitude and phase of optical carrier 526 may be tailored for different purposes. For example, since optical carriers 526 and 326 do not carry any information, the amplitude of carrier 526 may be minimized to reduce wasted power whereas the amplitude of carrier 326 is fixed by quadrature point 406.

A similar result may be obtained by various other approaches. For example, the third arm 516C may be replaced by an optical fiber. Some of the optical carrier produced by source 112 is diverted to the optical fiber and then recombined with the output produced by the MZM formed by arms 516A-516B. In another approach, the MZM formed by arms 516A-516B may be biased at a point other than the V_π point 404, thus producing an optical carrier. However, the phase and/or amplitude of the unmodulated carrier in arm 516C may be adjusted so that it interferes with the carrier produced by arms 516A-516B to generate an optical carrier with a desirable amplitude. The net result is an optical carrier of reduced amplitude. Alternately, referring again to FIG. 3, MZM 314 may be biased at a point close to but slightly offset from the V_π points 404. The slight offset will result in some carrier being introduced into the optical signal, thus resulting in a spectrum 330 with a reduced optical carrier as in spectrum 520.

FIG. 6 is a block diagram of one embodiment 690 of signal extractor 190 based on squaring a signal containing a tone and a sideband. Signal extractor 690 includes a bandpass filter 610, a square law device 620, and a low pass filter 630 coupled in series. The filters 610, 630 may be implemented in many different ways, for example, by a DSP chip or other logic

device implementing a digital filter, a lump LC filter, a surface acoustic wave filter, a crystal-based filter, a cavity filter, or a dielectric filter. Other implementations will be apparent. The square law device 620 also may be implemented in many different ways. A diode is one common implementation.

5 Signal extractor 690 recovers the information signal 140 from electrical signal 150 as follows. Bandpass filter 610 frequency filters one of the sidebands and one of the tones from electrical signal 150. In this example, signal 150 includes two sidebands 154 and an optical carrier 156. Bandpass filter 610 passes the upper sideband 154U and the optical carrier 156, and blocks the lower sideband 154L, thus producing spectrum 660. The square law device 620
10 squares the filtered components 660, resulting in spectrum 670. Spectrum 670 includes components 672 located at the difference of frequencies between sideband 154U and tone 156, and also components 674 located at the sum of these frequencies. Low pass filter 630 selects the difference components 672, thus recovering the information signal 140.

As noted previously, selection of the difference components 672 rather than the sum
15 components 674 is advantageous because it effectively cancels any noise sources which are common to both the tone 156 and sideband 154. In addition, processing a single sideband 154U, rather than both sidebands 154U and 154L together, prevents any potential destructive interference between the sidebands, as may be caused by the frequency dispersion effects discussed previously.

20 FIG. 7 is a block diagram of another embodiment 790 of signal extractor 190 based on multiplying a tone with a sideband. This extractor 790 includes two bandpass filters 710 and 712, a multiplier 720 and a low pass filter 730. The two bandpass filters 710, 712 are each coupled to receive the incoming electrical signal 150 and are coupled on their outputs to multiplier 720. The multiplier is coupled to low pass filter 730.

Bandpass filter 710 selects a tone 156 and bandpass filter 712 selects one of the sidebands 154. In this specific example, the optical carrier and upper sideband 154U are the selected components. Multiplier 720 multiplies the tone 156 against the selected sideband 154U, resulting in a signal with a sum component 774 and a difference component 772, as in FIG. 6.

5 Low pass filter 730 selects the difference component 772, thus recovering the information signal 140.

FIG. 8 is a block diagram of yet another embodiment 890 of signal extractor 190 using separate extraction paths for different sidebands. Example 890 includes two extraction paths 850A and 850B, and a combiner 860. Each extraction path 850 receives the incoming electrical

10 signal 150 and is coupled on the output side to combiner 860.

Each extraction path 850 processes a different sideband within the electrical signal 150 to recover information signals 140A and 140B, respectively. As an example, extraction path 850A might process the upper sideband 154U; whereas extraction path 850B processes the lower sideband 154L. Both extraction paths 850 may use the same tone (e.g., the optical carrier) in their processing, or they may use different tones. Combiner 860 receives the recovered information signals 140A and 140B and constructively combines them to produce a resultant difference component 140C, which contains the original information signal. The difference components 140A and 140B typically may be phase shifted with respect to each other in order to align their phases before they are combined; the amount of the phase shift may be frequency-

15 dependent. If difference components 140 are located at difference frequencies, combiner 860 may also frequency shift them to a common frequency before combining.

20

In a preferred embodiment, each path 850 is based on the approach of signal extractor 690 of FIG. 6, except that each extraction path 850 is designed to process a different sideband. Thus, for example, the bandpass filter 610 for extraction path 850A may be tuned to select the

25 optical carrier and upper sideband 154U; whereas the bandpass filter 610 for extraction path

850B might select the optical carrier and lower sideband 154L. Alternately, each extraction path 850 may be based on the approach of signal extractor 790 of FIG. 7.

FIG. 9 is a block diagram of one embodiment 990 of signal extractor 890 in which the extraction paths 850 share components, although the sidebands are still processed separately. In this embodiment, each of the extraction paths 850 is based on signal extractor 790. Extraction path 850A processes the upper sideband 154U; whereas extraction path 850B processes the lower sideband 154L. Both extraction paths use the optical carrier as the tone 526. Hence, they may share a common bandpass filter 710, which selects the optical carrier. In other words, the extraction paths are overlapping. The tone 526 is then fed to both multipliers 720 in each respective extraction path 850.

Combiner 860 includes a phase shifting element 912 and an adder 914. Phase shifting element 912 phase shifts the difference component 140A produced by extraction path 850A so that it is in phase with the difference component 140B produced by extraction path 850B. Adder 914 then adds the two in-phase components to produce the resulting difference component 140C.

In FIGS. 3-9, the optical carrier played the function of the tone 146. FIG. 10 illustrates an example in which a tone 146 is located at a frequency other than the carrier frequency. In particular, FIG. 10 is a diagram of another embodiment 1010 of transmitter 100 using a pilot tone. Transmitter 1010 includes an optical source 112 coupled to an MZM 314 as in FIG. 3. However, transmitter 1010 also includes a combiner 1020 and a pilot tone generator 1030. The pilot tone generator 1030 is coupled to one input of combiner 1020, the output of which drives MZM 314. The other input of combiner 1020 receives information signal 140.

In transmitter 1010, combiner 1020 combines the pilot tone at a frequency f_p with the incoming information signal 140 and uses the combined signal to modulate MZM 314. If MZM 314 is biased at the V_π point, the resulting spectrum 1040 will include upper and lower sidebands 1044 of the information signal, upper and lower sidebands 1048 of the pilot tone, and no optical

carrier. Each sideband 1048 of the pilot tone may be used by signal extractor 190 as a tone 146. In other words, the signal extractor may mix one of the pilot tones 1048 with one of the sidebands 1044 to recover the information signal 140.

5 All of the signal extractors 190 described above may be adapted for use with optical signal 1040. For example, referring to FIG. 6, bandpass filter 610 may be adjusted to select one of the sidebands 1044 and one of the pilot tones 1048. The square law device 620 would then produce a corresponding difference component 672. Since this difference component might not lie exactly at baseband, low pass filter 630 may also need to be adjusted in order to recover the correct frequency components. Similarly, referring to FIG. 7, extractor 790 may be adapted for use with signal 1040 by similarly adjusting the frequency bands for filters 710, 712, and 730 to select an appropriate sideband 1044, pilot tone 1048 and difference component 772, respectively. Similar adjustments may be made to the systems discussed in FIGS. 8 and 9. Transmitter 1010 and optical signal 1040 are merely illustrative, other combinations of tones and sidebands will be apparent.

10
15 Although the invention has been described in considerable detail with reference to certain preferred embodiments thereof, other embodiments are possible. Therefore, the scope of the appended claims should not be limited to the description of the preferred embodiments contained herein.

WHAT IS CLAIMED IS:

1. An optical communications system for communicating an information signal comprising:
a receiver for recovering an information signal from an optical signal containing the
information signal, the receiver comprising:
a heterodyne detector for mixing an optical local oscillator signal with an optical
signal including at least one tone and a first sideband of the information
signal, to produce an electrical signal which is a frequency down-shifted
version of the optical signal; and
a signal extractor coupled to the heterodyne detector for mixing the first sideband
of the electrical signal with one of the tones of the electrical signal to
produce a first component containing the information signal.
2. The optical communications system of claim 1 wherein the heterodyne detector
comprises:
an optical combiner for combining the optical local oscillator signal and the optical
signal; and
a square law detector disposed to receive the combined optical local oscillator signal and
optical signal.
3. The optical communications system of claim 2 wherein the heterodyne detector further
comprises:
a polarization controller coupled to the optical combiner for matching a polarization of
the optical local oscillator signal with a polarization of the optical signal.
4. The optical communications system of claim 1 wherein the signal extractor comprises:
a first frequency filter for selecting the first sideband and one of the tones from the
electrical signal;

4 a square law device coupled to the first frequency filter for squaring the frequency
5 selected first sideband and tone to produce the first component; and
6 a second frequency filter coupled to the square law device for selecting the first
7 component.

1 5. The optical communications system of claim 1 wherein the signal extractor comprises:
2 a first frequency filter for selecting the first sideband from the electrical signal;
3 a second frequency filter for selecting one of the tones from the electrical signal;
4 a multiplier coupled to the first and second frequency filters for multiplying the selected
5 first sideband with the selected tone to produce the first component; and
6 a third frequency filter coupled to the multiplier for selecting the first component.

1 6. The optical communications system of claim 1 wherein:
2 the optical signal further includes a second sideband of the information signal; and
3 the signal extractor comprises:
4 a first extraction path for mixing the first sideband of the electrical signal with one
5 of the tones of the electrical signal to produce the first component;
6 a second extraction path for mixing the second sideband of the electrical signal
7 with one of the tones of the electrical signal to produce a second
8 component; and
9 a combiner for constructively combining the first and second components to
10 produce a resultant component containing the information signal.

1 7. The optical communications system of claim 6 wherein the first extraction path overlaps
2 with the second extraction path.

1 8. The optical communications system of claim 6 wherein each of the first and second
2 extraction paths comprises:

a first frequency filter for selecting the relevant sideband and tone from the electrical signal;
a square law receiver coupled to the first frequency filter for squaring the frequency selected sideband and tone to produce the component; and
a second frequency filter coupled to the square law receiver for selecting the component.

9. The optical communications system of claim 6 wherein each of the first and second extraction paths comprises:

a first frequency filter for selecting the relevant sideband from the electrical signal;
a second frequency filter for selecting the relevant tone from the electrical signal;
a multiplier coupled to the first and second frequency filters for multiplying the selected sideband with the selected tone to produce a component; and
a third frequency filter coupled to the multiplier for selecting the component.

10. The optical communications system of claim 6 wherein the combiner comprises:

a phase shifter coupled to the first extraction path for phase-shifting the first component to be in-phase with the second component; and
an adder for adding the phase-shifted first component and the second component.

11. The optical communications system of claim 1 wherein the tone includes a carrier for the optical signal.

12. The optical communications system of claim 1 wherein the tone includes a pilot tone located at a frequency separated from a carrier frequency for the optical signal.

13. The optical communications system of claim 1 wherein the first component includes a difference component.

14. The optical communications system of claim 1 further comprising:
a transmitter for generating the optical signal.

1 15. The optical communications system of claim 14 wherein the transmitter comprises:
2 a 1:3 splitting section, for splitting a received optical carrier into three sub-signals;
3 a first and a second transmission leg, each leg coupled to receive one of the three sub-
4 signals from the 1:3 splitting section, for modulating the received optical carrier
5 with a received information signal;
6 a third transmission leg, coupled to receive one of the three sub-signals from the 1:3
7 splitting section, for producing an unmodulated version of the received optical
8 carrier; and
9 a 3:1 combining section coupled to the first, second and third transmission legs, for
10 combining the modulated optical carrier with the unmodulated optical carrier.

1 16. A transmitter comprising:
2 a 1:3 splitting section, for splitting a received optical carrier into three sub-signals;
3 a first and a second transmission leg, each leg coupled to receive one of the three sub-
4 signals from the 1:3 splitting section, for modulating the received optical carrier
5 with a received information signal;
6 a third transmission leg, coupled to receive one of the three sub-signals from the 1:3
7 splitting section, for producing an unmodulated version of the received optical
8 carrier; and
9 a 3:1 combining section coupled to the first, second and third transmission legs, for
10 combining the modulated optical carrier with the unmodulated optical carrier.

1 17. The transmitter of claim 16 wherein the third transmission leg includes a control section
2 for controlling an amplitude of the unmodulated optical carrier.

1 18. The transmitter of claim 16 wherein the third transmission leg includes a control section
2 for controlling a phase of the unmodulated optical carrier.

1 19. A transmitter comprising:

a combiner for combining a received pilot tone with a received information signal to produce an intermediate signal; and an optical modulator for modulating a received optical carrier with the intermediate signal.

20. The transmitter of claim 19 wherein the optical modulator includes a Mach-Zender modulator.

21. A method for recovering an information signal from an optical signal containing the information signal, the method comprising:

receiving an optical signal including at least one tone and a first sideband of the information signal;

receiving an optical local oscillator signal at a frequency f_{LO} ;

detecting the optical signal using heterodyne detection and the optical local oscillator signal to produce an electrical signal which is frequency down-shifted by the amount f_{LO} with respect to the optical signal; and

mixing the first sideband of the electrical signal with one of the tones of the electrical signal to produce a first component containing the information signal.

22. The method of claim 21 wherein the step of detecting the optical signal comprises: combining the optical local oscillator signal and the optical signal; and detecting the combined optical local oscillator signal and optical signal using square law detection.

23. The method of claim 22 wherein the step of detecting the optical signal further comprises: matching a polarization of the optical local oscillator signal with a polarization of the optical signal.

24. The method of claim 21 wherein the step of mixing the first sideband of the electrical signal with one of the tones of the electrical signal comprises:

frequency filtering the first sideband and the tone from the electrical signal;
squaring the first sideband and tone to produce the first component; and
frequency filtering the first component.

25. The method of claim 21 wherein the step of mixing the first sideband of the electrical signal with one of the tones of the electrical signal comprises:

frequency filtering the first sideband from the electrical signal;
frequency filtering the tone from the electrical signal;
multiplying the first sideband with the tone to produce the first component; and
frequency filtering the first component.

26. The method of claim 21 wherein:

the optical signal further includes a second sideband of the information signal; and
the method further comprises:

mixing the second sideband of the electrical signal with one of the tones of the electrical signal to produce a second component containing the information signal; and

constructively combining the first and second components to produce a resultant component containing the information signal.

27. The method of claim 26 wherein:

the step of mixing the first sideband of the electrical signal with one of the tones of the electrical signal comprises:

frequency filtering the first sideband and the tone from the electrical signal;
squaring the first sideband and tone to produce the first component; and
frequency filtering the first component; and

the step of mixing the second sideband of the electrical signal with one of the tones of the electrical signal comprises:

frequency filtering the second sideband and the tone from the electrical signal;

10 squaring the second sideband and tone to produce the second component; and
11 frequency filtering the second component.

1 28. The method of claim 26 wherein:

2 the step of mixing the first sideband of the electrical signal with one of the tones of the
3 electrical signal comprises:

4 frequency filtering the first sideband from the electrical signal;

5 frequency filtering the tone from the electrical signal;

6 multiplying the first sideband with the tone to produce the first component; and

7 frequency filtering the first component; and

8 the step of mixing the second sideband of the electrical signal with one of the tones of the
9 electrical signal comprises:

10 frequency filtering the second sideband from the electrical signal;

11 frequency filtering the tone from the electrical signal;

12 multiplying the second sideband with the tone to produce the second component;

13 and

14 frequency filtering the second component.

15 29. The method of claim 26 wherein the step of constructively combining the first and second
16 components comprises:

17 phase-shifting the first component to be in-phase with the second component; and

18 adding the phase-shifted first component and the second component.

19 30. The method of claim 21 wherein the tone includes a carrier for the optical signal.

20 31. The method of claim 30 further comprising:

21 modulating an optical carrier with the information signal using a raised cosine

22 modulation biased at a V_{π} point; and

combining the modulated optical carrier with an unmodulated optical carrier to produce the optical signal.

32. The method of claim 30 further comprising:

modulating an optical carrier with the information signal using a raised cosine modulation biased at a point slightly offset from a V_{π} point to produce the optical signal.

33. The method of claim 21 wherein the tone includes a pilot tone located at a frequency separated from a carrier frequency for the optical signal.


34. The method of claim 33 further comprising:

combining the information signal with a pilot tone; and
modulating an optical carrier with the combined information signal and pilot tone using a raised cosine modulation biased at a V_{π} point.

OPTICAL COMMUNICATIONS USING HETERODYNE DETECTION**ABSTRACT OF THE DISCLOSURE**

A receiver recovers an information signal from an optical signal which includes at least one tone and at least one sideband of the information signal. The receiver includes a heterodyne detector coupled to a signal extractor. The heterodyne detector mixes the optical signal with an optical local oscillator signal to produce an electrical signal which is a frequency down-shifted version of the optical signal. The signal extractor mixes one of the tones with one of the sidebands in the electrical signal, generating a component, preferably the difference component, which contains the original information signal.

FIG. 1

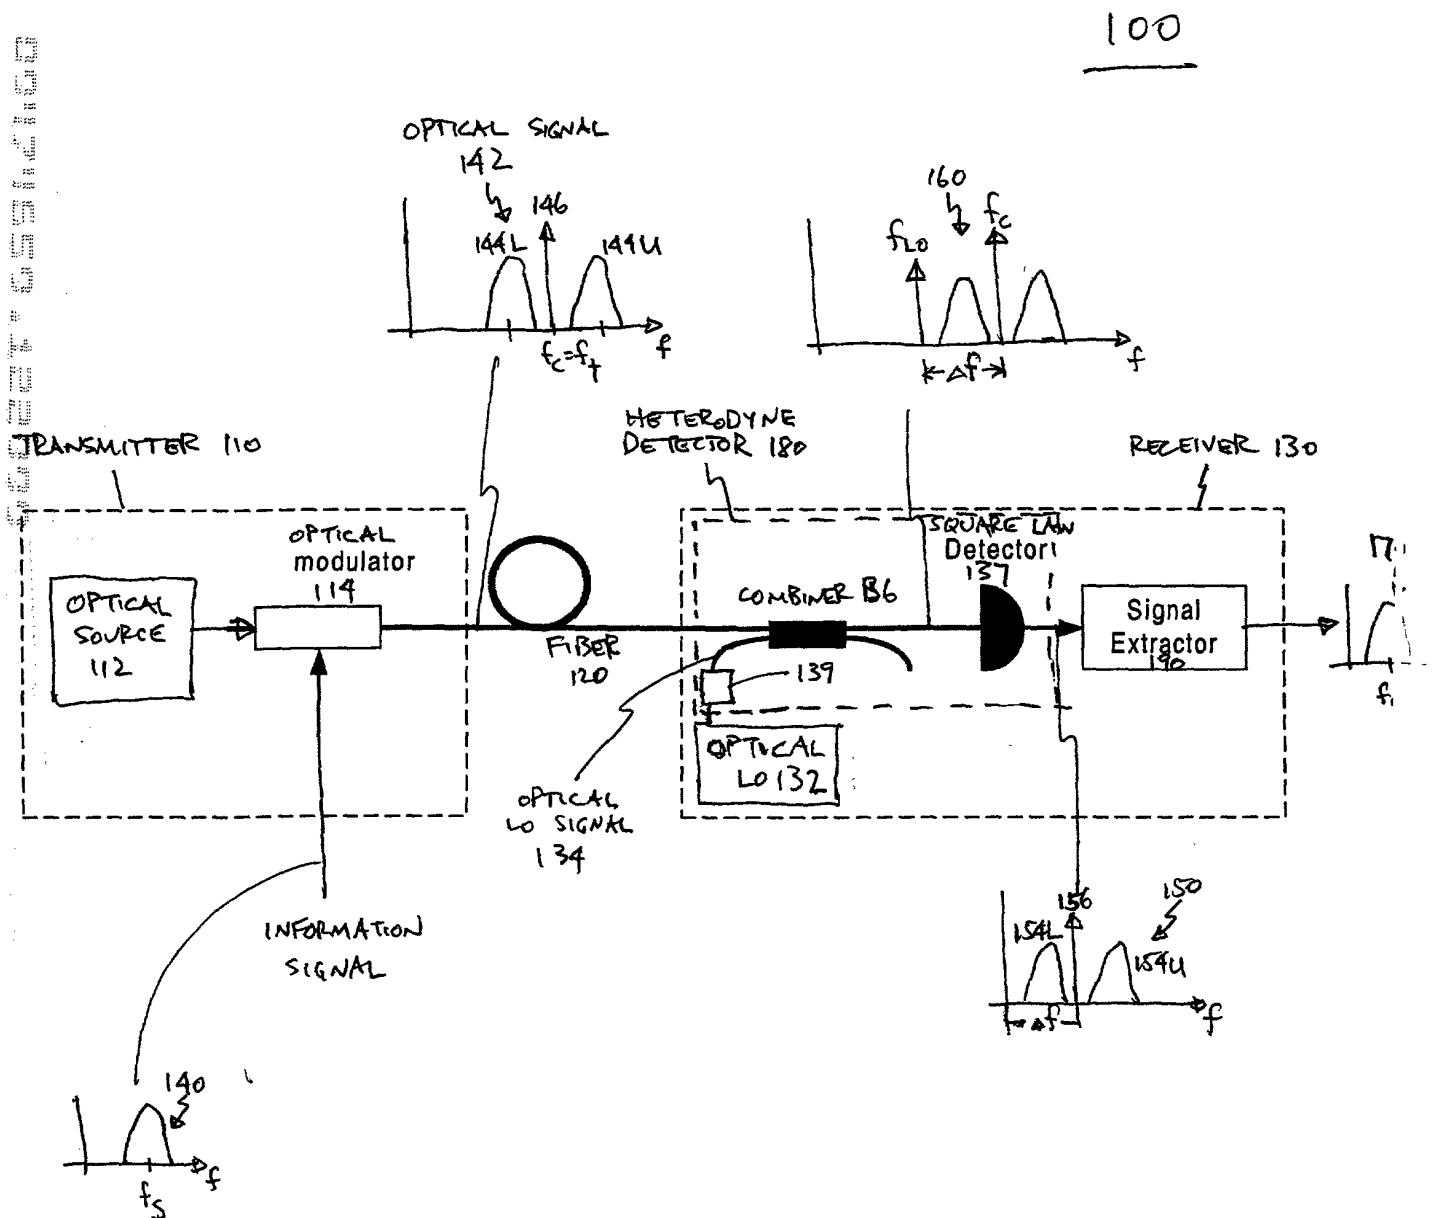

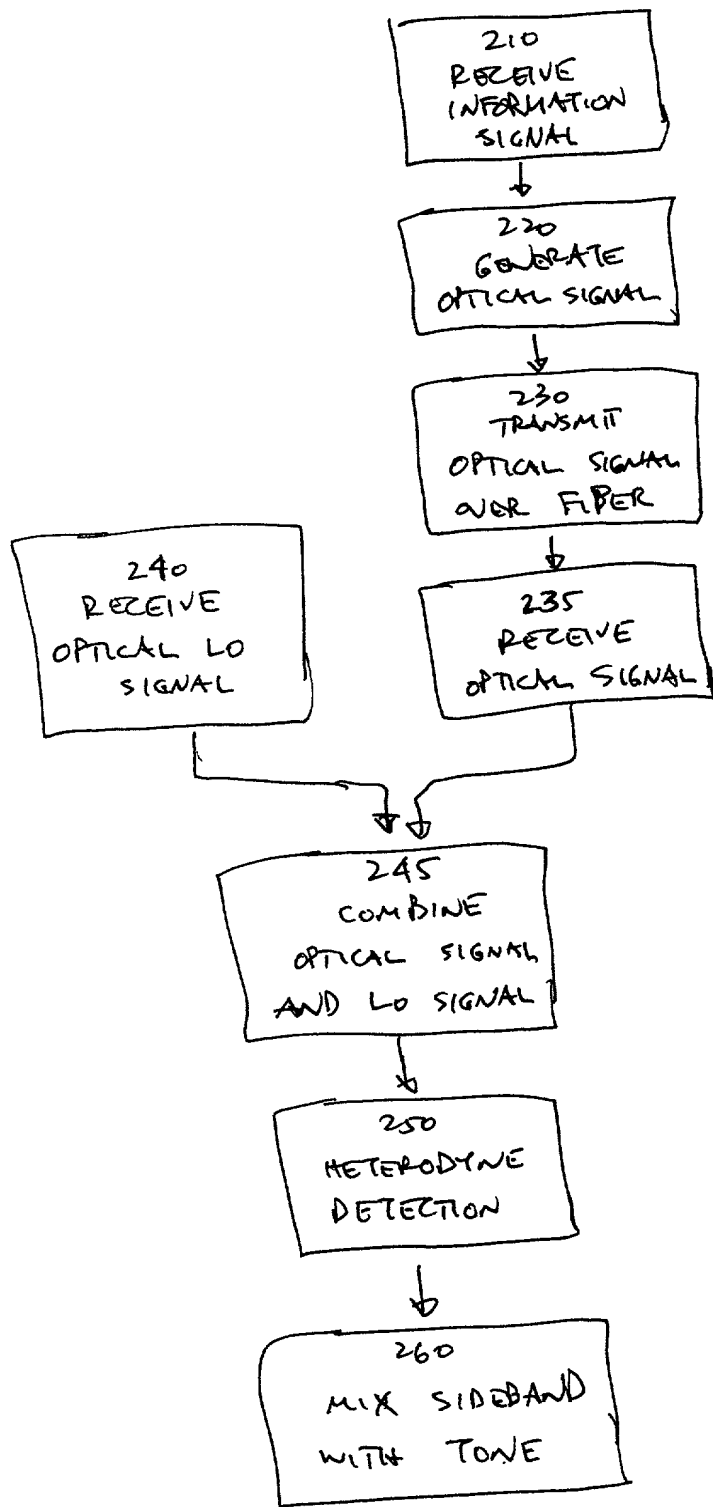


FIG. 2

310

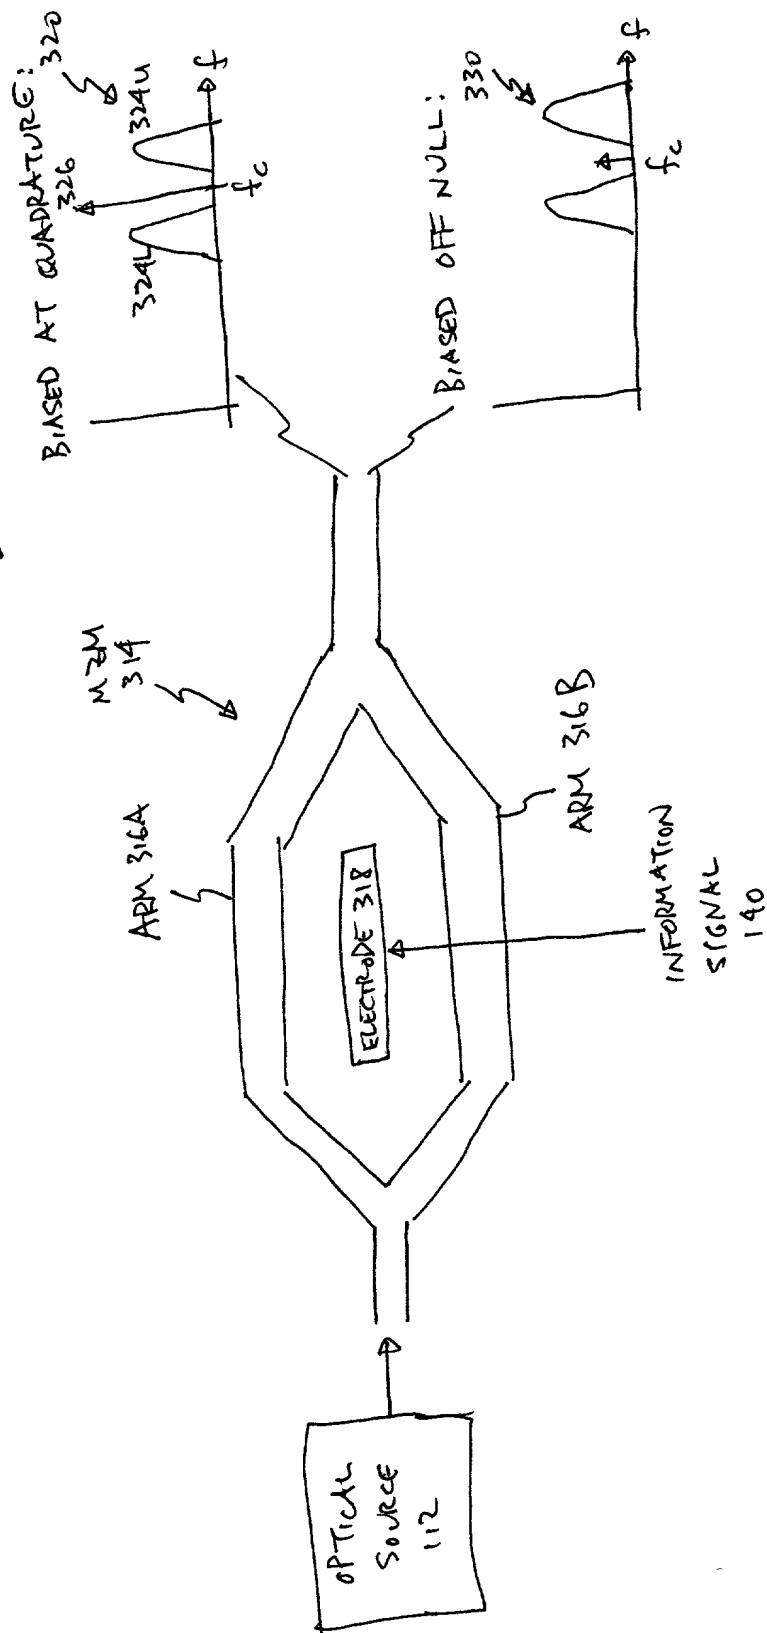


FIG. 3

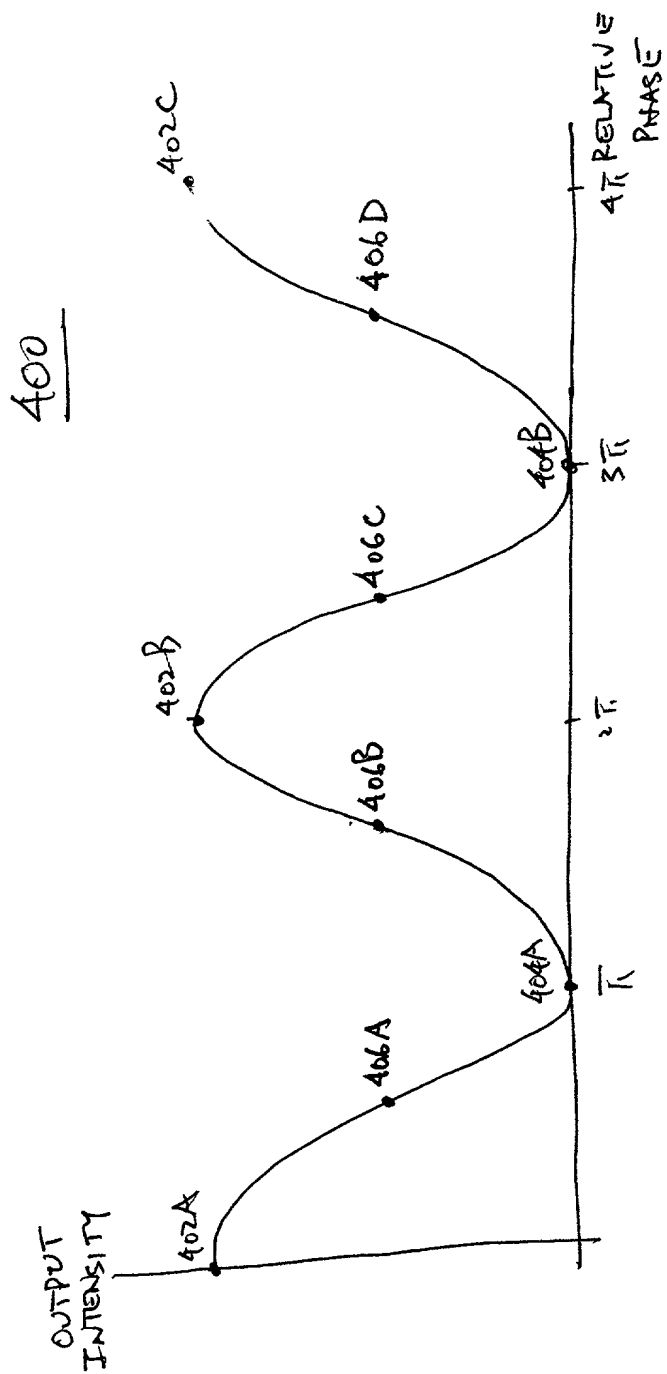


FIG. 4

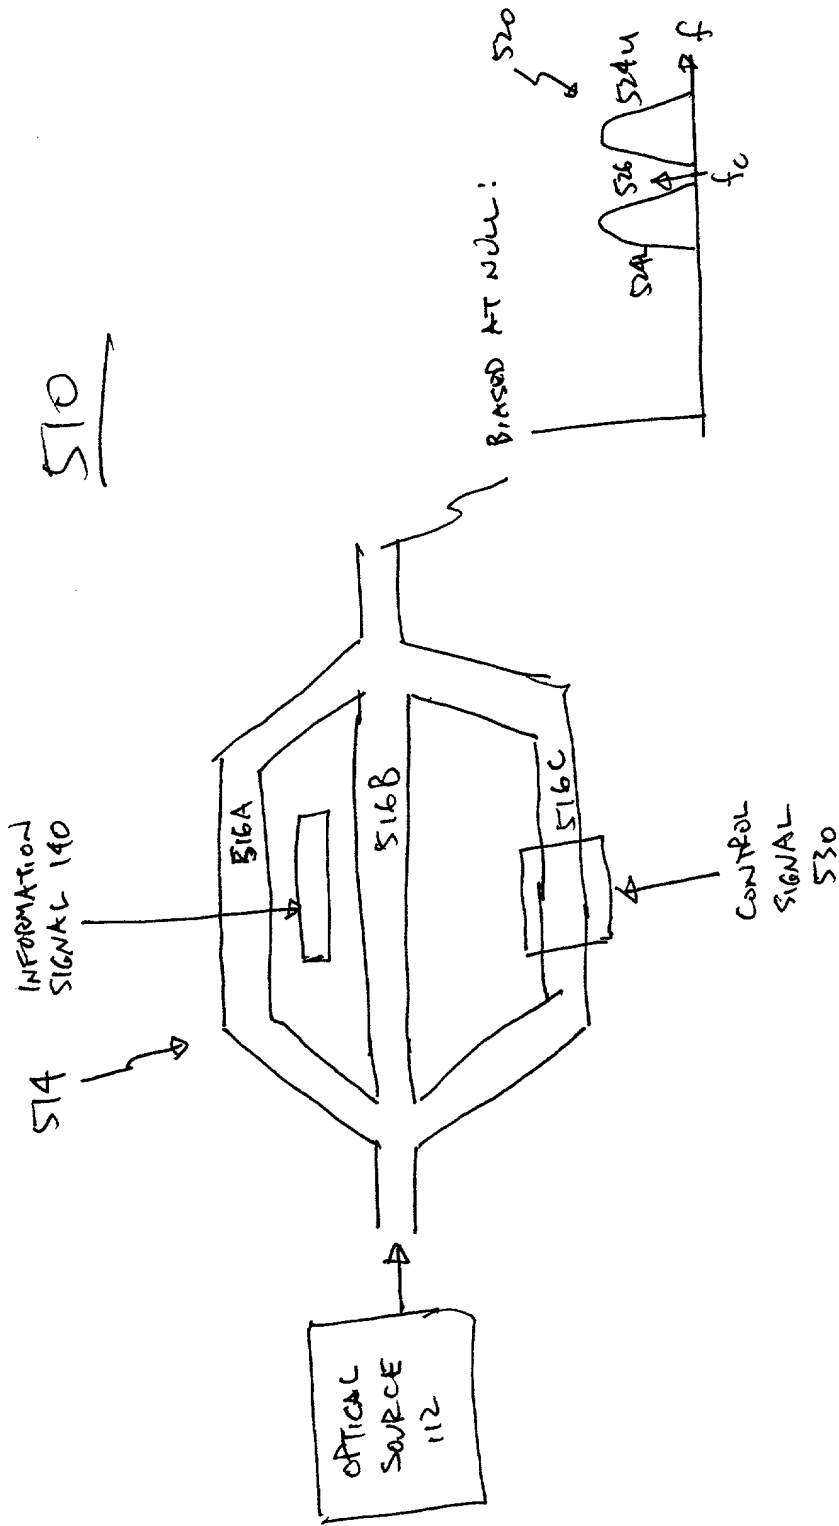


FIG. 5

690

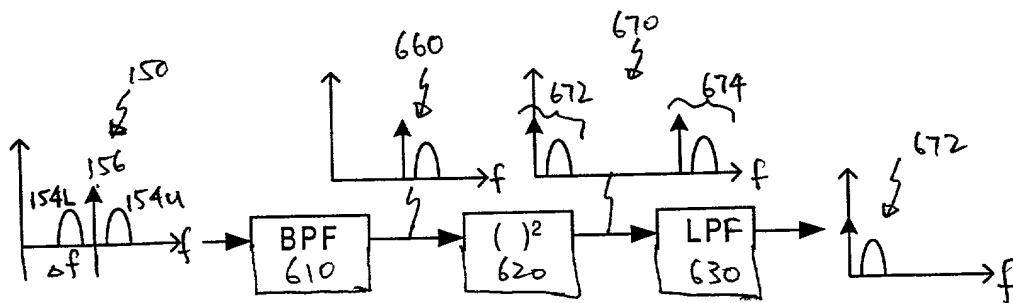


FIG. 6

790

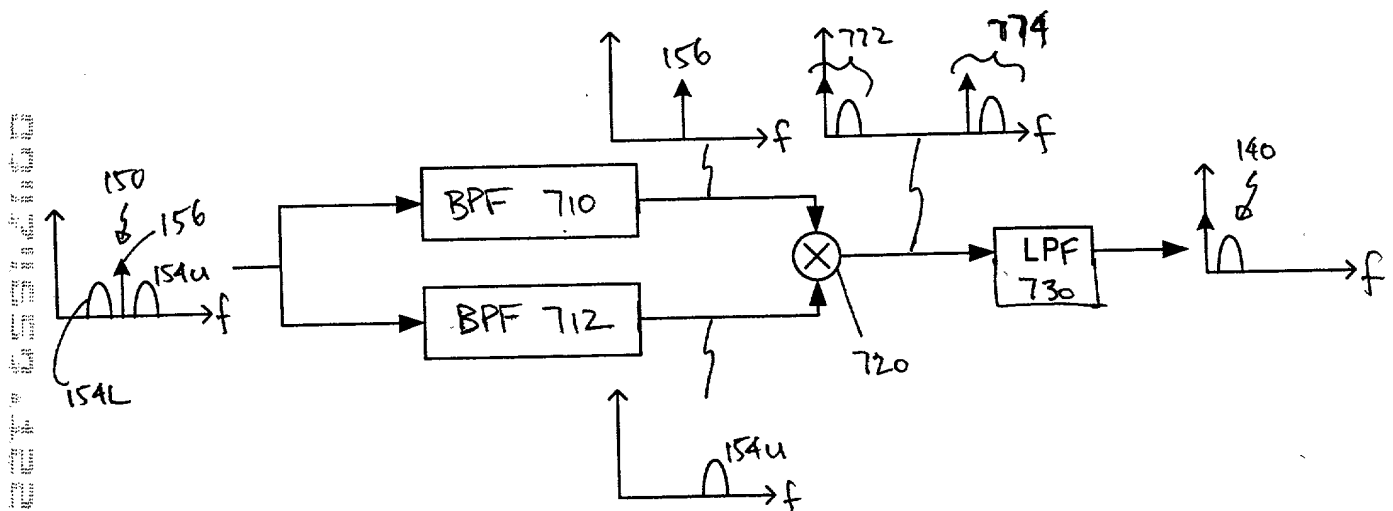


FIG. 7

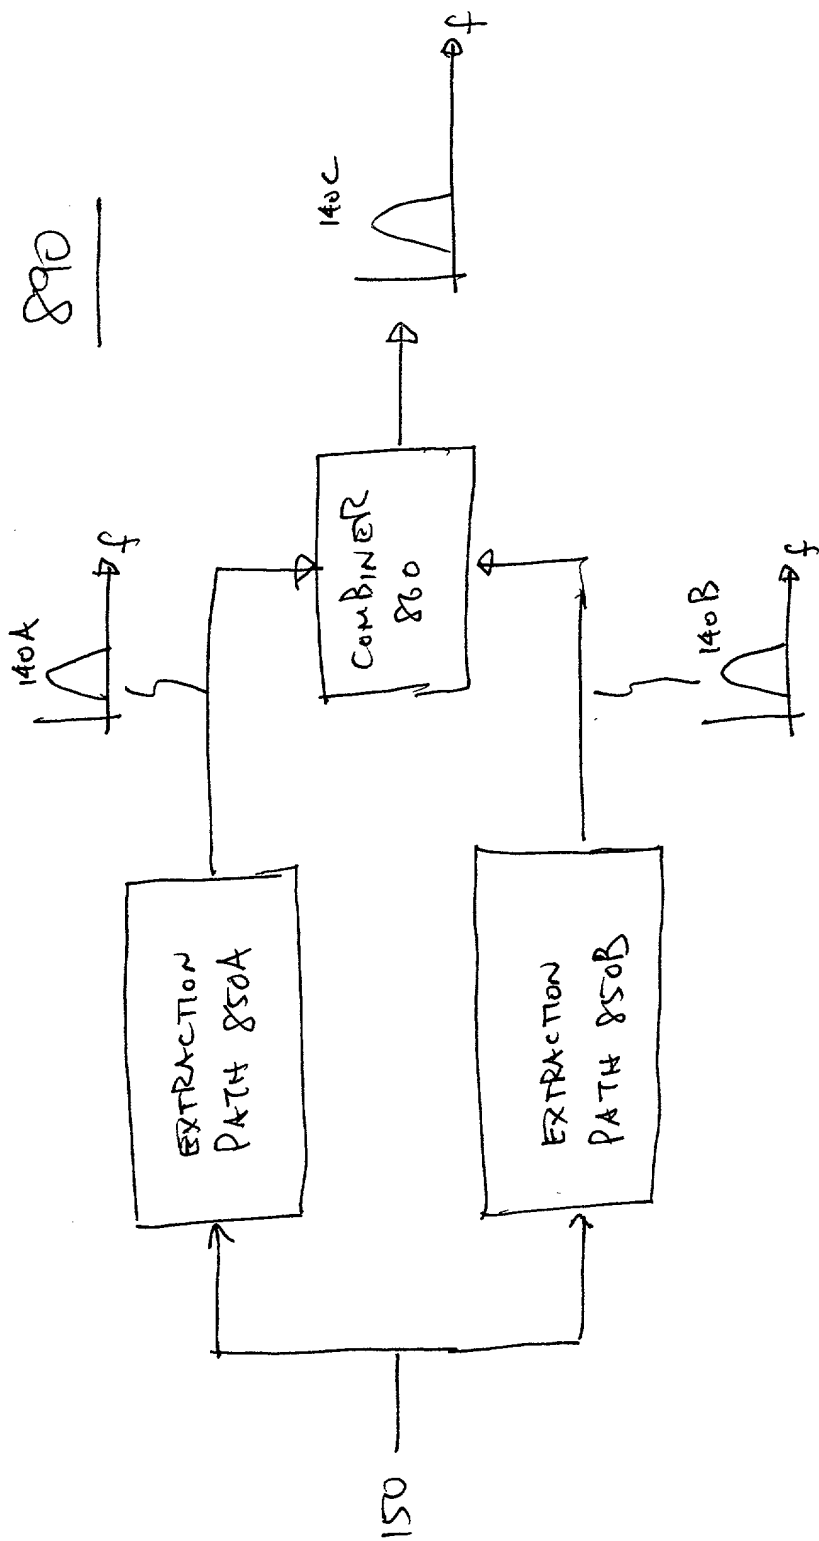


FIG. 8

990

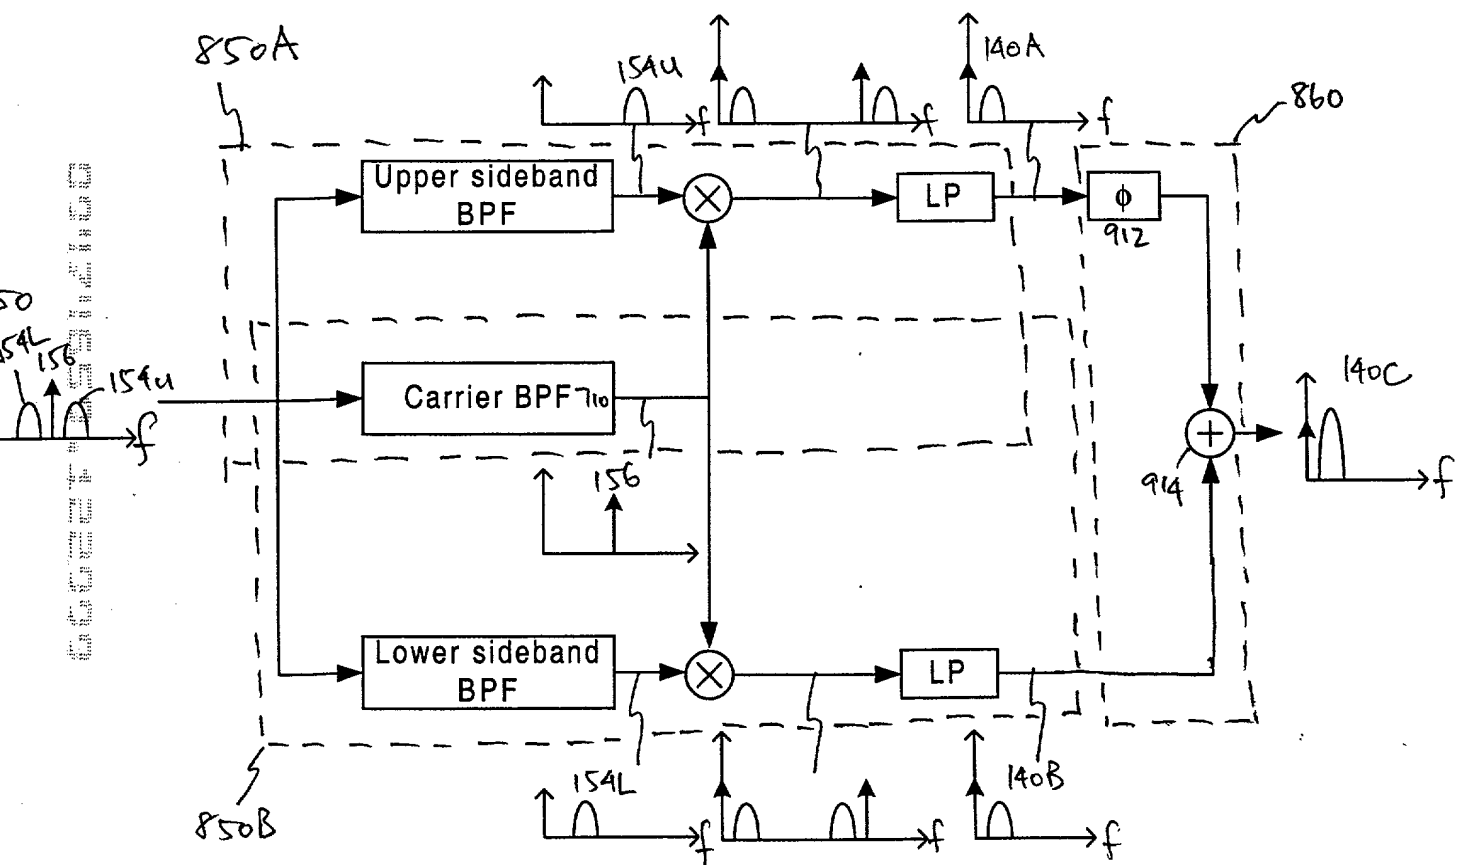


FIG. 9

1010

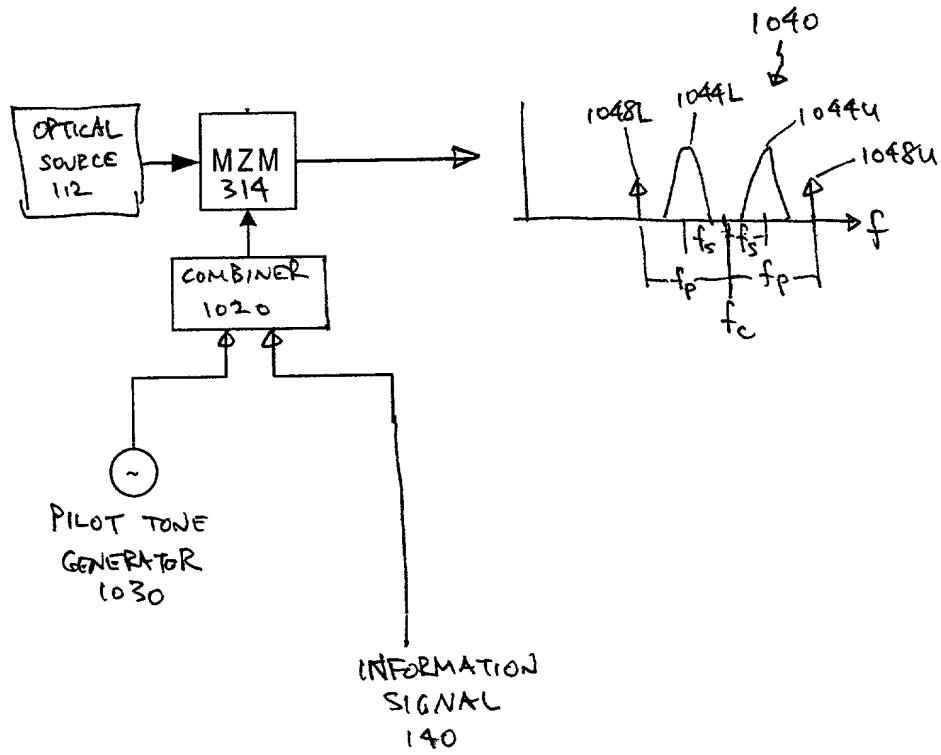


FIG. 10

0010/PTO Rev. 6/95	U.S. Department of Commerce Patent and Trademark Office	Attorney Docket Number 3982 US	
DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION		First Named Inventor Ting K. Yee	
		COMPLETE IF KNOWN	
		Application Number Unassigned	
		Filing Date December 29, 1999	
		Group Art Unit Unassigned	
		Examiner Name Unassigned	
<div style="display: flex; justify-content: space-between;"> <div> <input checked="" type="checkbox"/> Declaration Submitted with Initial Filing </div> <div>OR</div> <div> <input type="checkbox"/> Declaration Submitted after Initial Filing </div> </div>			

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

OPTICAL COMMUNICATIONS USING HETERODYNE DETECTION

the specification of which

(Title of the Invention)

☒ is attached hereto

OR

☐ was filed on (MM/DD/YYYY) [] as United States Application Number or PCT International Application Number [] and was amended on (MM/DD/YYYY) [] (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37 Code of Federal Regulations. § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code § 119 (a)-(d) or § 385(b) of any foreign application(s) for patent or inventor's certificate, or § 365 (a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority sheet attached hereto:

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	
		<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental sheet attached hereto.

DECLARATION

Page 2

I hereby claim the benefit under Title 35, United States Code § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application Number	PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority sheet attached hereto.

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Name	Registration Number	Name	Registration Number
Greg T. Sueoka John R. Carr	33,800 42,390	Michael W. Farn	41,015

☐ Additional attorney(s) and/or agent(s) named on a supplemental sheet attached hereto.

Please direct all correspondence to:

Michael W. Farn
Fenwick & West LLP
Two Palo Alto Square
Palo Alto, CA 94306
U.S.A.

Telephone (650) 858-7823

Fax (650) 494-1417

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:

☐ A petition has been filed for this unsigned inventor

Given Name	Ting	Middle Initial	K.	Family Name	Yee	Suffix e.g. Jr.	
---------------	-------------	-------------------	-----------	----------------	------------	--------------------	--

Inventor's Signature		Date	
-------------------------	--	------	--

Residence: City	Foster City	State	CA	Country	USA	Citizenship	USA
-----------------	--------------------	-------	-----------	---------	------------	-------------	------------

Mailing Address	348 Dolphin Isle
-----------------	-------------------------

Mailing Address	
-----------------	--

City	Foster City	State	CA	Zip	94404	Country	USA
------	--------------------	-------	-----------	-----	--------------	---------	------------

☒ Additional inventors are being named on supplemental sheet(s) attached hereto

DECLARATION				ADDITIONAL INVENTOR(S) Supplemental Sheet			
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name	Peter	Middle Initial	H.	Family Name	Chang	Suffix	
Inventor's Signature						Date	
Residence: City	San Jose	State	CA	Country	USA	Citizenship	USA
Mailing Address	1232 Donington Drive						
Mailing Address							
City	San Jose	State	CA	Zip	95129	Country	USA
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name		Middle Initial		Family Name		Suffix	
Inventor's Signature						Date	
Residence: City		State		Country		Citizenship	
Mailing Address							
Mailing Address							
City		State		Zip		Country	
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name		Middle Initial		Family Name		Suffix	
Inventor's Signature						Date	
Residence: City		State		Country		Citizenship	
Mailing Address							
Mailing Address							
City		State		Zip		Country	
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name		Middle Initial		Family Name		Suffix	
Inventor's Signature						Date	
Residence: City		State		Country		Citizenship	
Mailing Address							
Mailing Address							
City		State		Zip		Country	
<input type="checkbox"/> Additional inventors are being named on supplemental sheet(s) attached hereto							